



## **FOOTING OPTION “A”**

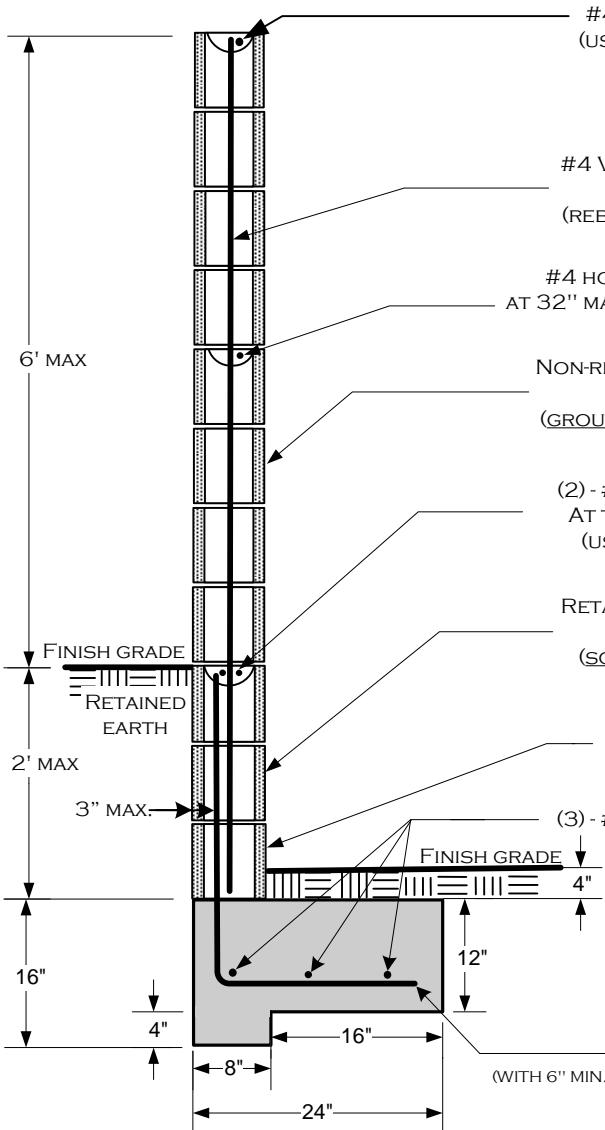

## **FOOTING OPTION “B”**

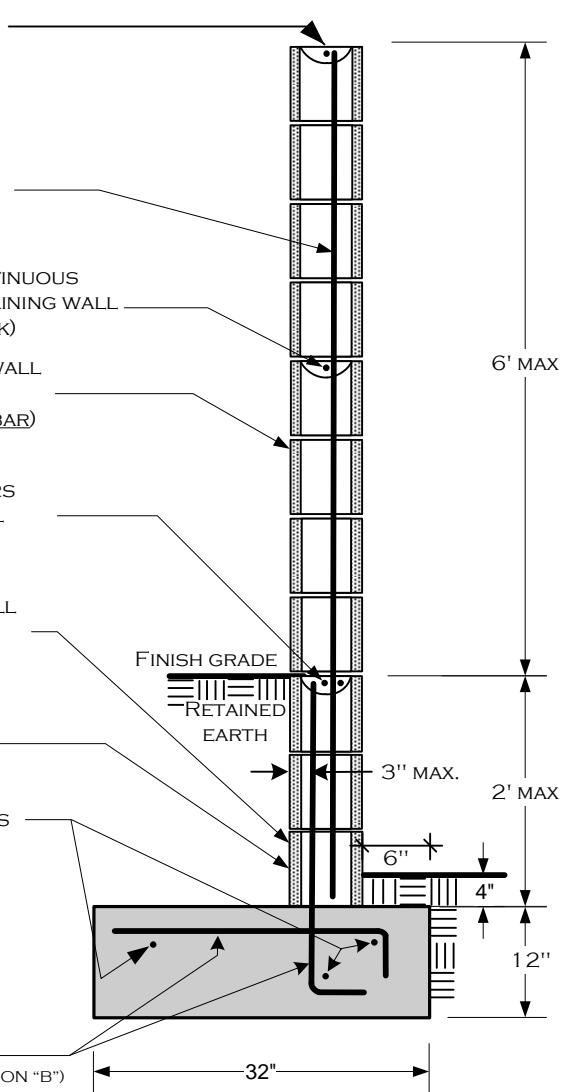

**THE FOLLOWING INSPECTIONS ARE REQUIRED:**

- 1) FOOTING; EXCAVATION TRENCH CLEAN WITH STEEL IN PLACE AND SUPPORTED 3" ABOVE AND AWAY FROM THE SURROUNDING EARTH/DIRT.
  - 2) REBAR/PRE-GROUT; BOND BEAM REBAR AND VERTICAL REBAR IN PLACE - INSPECTION PRIOR TO PLACING GROUT.
  - 3) FINAL : AFTER GROUT IS PLACED - PRIOR TO ANY DECORATIVE CAP PLACEMENT

## NOTES.


- NOTES:**

  - 1) FENCE HEIGHTS ARE REGULATED — CONSULT ZONING REGULATIONS BEFORE BEGINNING CONSTRUCTION.
  - 2) NO WATER COURSE OR NATURAL DRAINAGE SHALL BE OBSTRUCTED.
  - 3) ALL REBAR TO BE ASTM SPEC. A615, GRADE 40 MINIMUM.
  - 4) ALL REBAR LAP SPLICES TO BE 24" MINIMUM.
  - 5) ALL MASONRY UNITS TO BE ASTM C-90 GRADE N.
  - 6) NOT DESIGNED FOR SURCHARGE LOADS FROM VEHICLES OR STRUCTURES


## DISCLAIMER:

ALTERNATE DESIGNS MAY BE POSSIBLE WHEN PROVIDED WITH AN ENGINEERED ANALYSIS. USE OF THIS STANDARD DESIGN IS AT THE USER'S RISK AND CARRIES NO IMPLIED OR INFERRED GUARANTEE AGAINST FAILURE OR DEFECTS.

ALL FOOTINGS ADJACENT TO  
SLOPES TO BE AT LEAST 5' TO  
DAYLIGHT AS SHOWN BELOW



**\*SEE PAGE 2 FOR ADDITIONAL INFORMATION\***

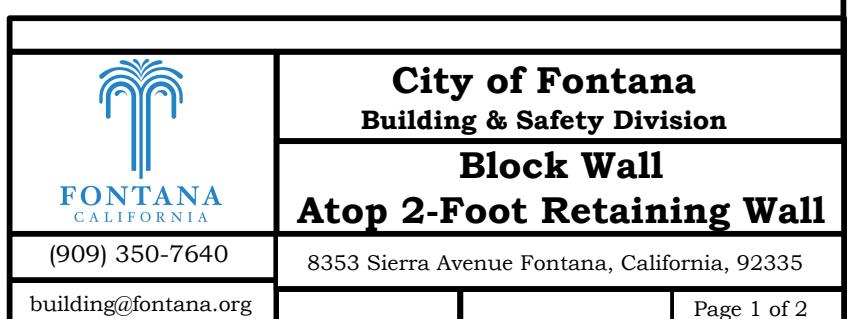

## REBAR PLACEMENT

### ILLUSTRATION



(SEE PAGE 1 FOR SPECIFIC REQUIREMENTS)

(TYPICAL)

FOR THE RETAINING PORTION OF WALL  
ALL CELLS TO BE GROUTED

(TYPICAL)

FOR NON-RETAINING PORTION OF WALL  
ONLY CELLS AND BOND BEAM COURSES  
WITH REBAR TO BE GROUTED  
(USE GROUT STOP MESH AS APPROPRIATE)

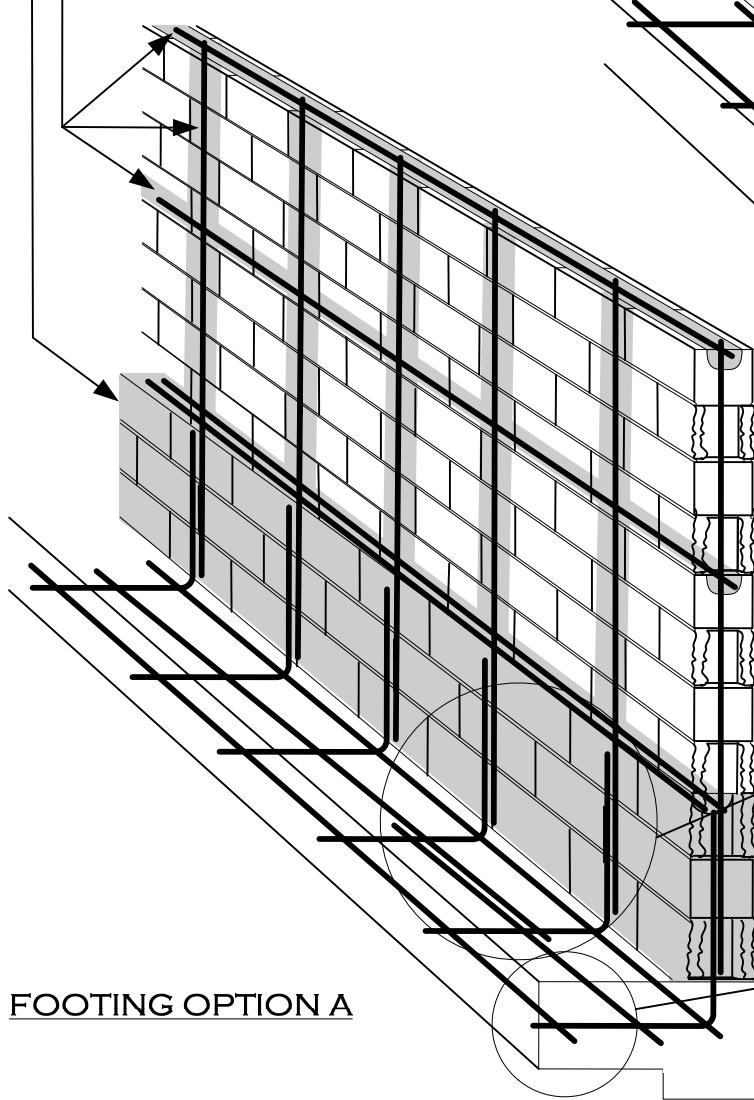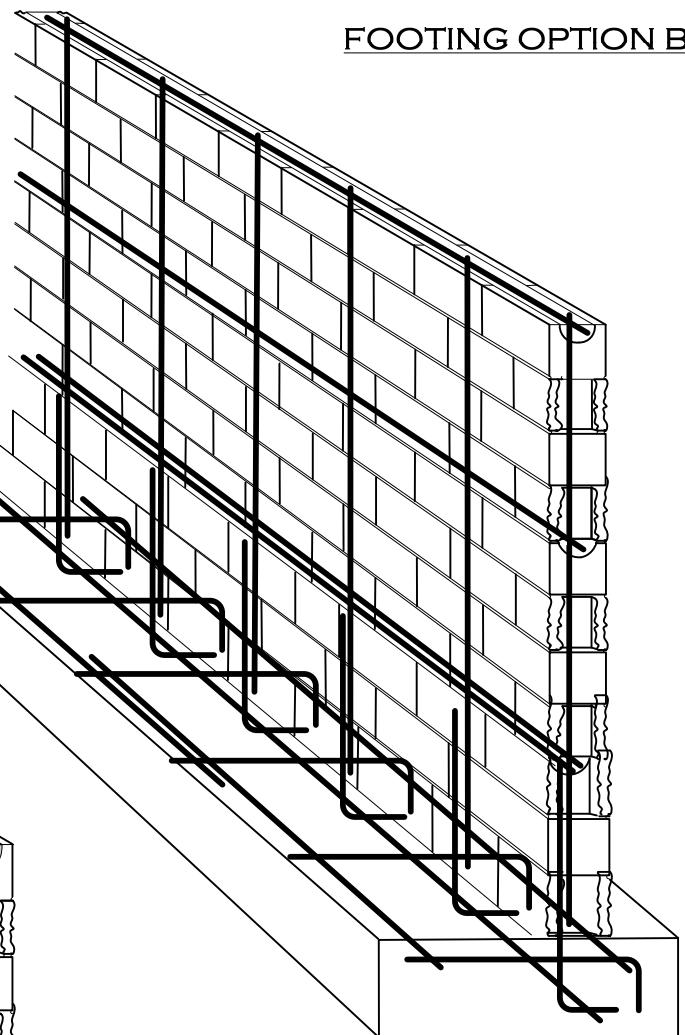

#### DESIGN PARAMETERS:

ACTIVE SOIL PRESSURE (PSF) = 30  
PASSIVE SOIL BEARING (PSF) = 150  
COEFFICIENT OF FRICTION = 0.25  
ALLOWABLE SOIL BEARING (PSF) = 1500



**City of Fontana**  
Building & Safety Division

**Block Wall**  
**Atop 2-Foot Retaining Wall**

(909) 350-7640

8353 Sierra Avenue  
Fontana, California, 92335

building @fontana.org

Page 2 of 2